

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number
WO 01/05879 A1

(51) International Patent Classification⁷: C08J 3/20, C08K 9/04, C08L 23/02, C08F 2/44, C01B 33/38

(74) Agent: NIEUWKAMP, Johannes, Gerardus, Maria; DSM Patents & Trademarks, P.O. Box 9, NL-6160 MA Geleen (NL).

(21) International Application Number: PCT/NL00/00467

(22) International Filing Date: 3 July 2000 (03.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1012636 19 July 1999 (19.07.1999) NL

(71) Applicant (for all designated States except US): DSM N.V. [NL/NL]; Het Overloon 1, NL-6411 TE Heerlen (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LANGEREIS, Sander [NL/NL]; Henri Hermanslaan 220, NL-6160 MD Geleen (NL). LOONTJENS, Jacobus, Antonius [NL/NL]; Synagogeplantsoen 76, NL-6231 KK Meerssen (NL).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 01/05879 A1

(54) Title: PROCESS FOR THE PRODUCTION OF A POLYOLEFIN-BASED COMPOSITE MATERIAL OF HIGH RIGIDITY

(57) Abstract: The invention relates to a process for the production of a polyolefin-based composite material of high rigidity, containing a polyolefin and a layered clay, by impregnating a layered, swellable clay which is interstratified with a tetraalkyl cation, with at least one polymerizable monomer and then mixing this impregnated clay with a polyolefin and a peroxide, at a temperature above the melting point of the polyolefin. The invention also relates to a polyolefin-based composite material of high rigidity containing 98-50 wt.% of a polyolefin, 1-50 wt.% of another homo- or copolymer and 1-50 wt.% of a layered clay, wherein the ratio between the modulus of elasticity of the material and that of the initial polyolefine, at a temperature which is 30 °C below the melting temperature of the polyolefin, is higher than or equal to 1.

- 1 -

5 PROCESS FOR THE PRODUCTION OF A POLYOLEFIN-BASED
 COMPOSITE MATERIAL OF HIGH RIGIDITY

 The invention relates to a process for the
production of a polyolefin-based composite material of
10 high rigidity, said material comprising a polyolefin
and a layered clay.

 Such a process is known from EP-A-807,659,
according to which a modified polyolefin or a
polyolefin containing such a modified polyolefin is
15 mixed with a swellable clay in the form of a layered
silicate which has been treated (interstratified) with
a tetraalkylammonium cation, resulting in a polyolefin-
based composite material of high rigidity.

 A drawback of said process is that prior to
20 mixing the polyolefin with the silicate, both the
silicate and the polyolefin have to be subjected to a
pretreatment.

 The aim of the invention is to provide a
process which is free of this drawback.

25 This aim is achieved in that the
polyolefin-based composite material is obtained by
impregnating a layered, swellable clay which is
interstratified with a tetraalkylonium cation, with at
least one polymerizable monomer and then mixing this
30 impregnated clay with a polyolefin and a peroxide, at a
temperature above the melting temperature of the
polyolefin.

 In this way it is achieved that
pretreatment of the polyolefin resulting in a modified
35 polyolefin is not necessary any more in order to obtain

a polyolefin-based composite material having a comparable or improved rigidity with the same quantity of clay. This improved rigidity is manifest in particular at an elevated temperature. Also, due to the
5 process of the invention a costly process step is made superfluous.

The layered, swellable clay that is used in the process according to the invention is for instance a layered clay containing magnesium silicate or
10 aluminium silicate. Examples of suitable types of clay are smectite types of clay, such as montmorillonite, saponite, beidellite, hectorite, nontronite, volkonskoite, pyroysite, sauconite, magadiite, kenyaite and stevensite; vermiculite types of clay such as
15 trioctaedral vermiculite and dooctaedral vermiculite; and micas, such as muscovite, phlogopite, biotite, lepidolite, paragonite and tetrasilicic.

Montmorillonite is used by preference, because this clay swells readily and thus easily
20 absorbs polymerizable monomers.

In order to be able to be impregnated with one or more polymerizable monomers, the layered clay first has to be treated with a tetraalkylammonium or tetraalkylfosfonium salt, as described for instance in
25 "Interlayer Structure and Molecular Environment of Alkylammonium Layered Silicates", R.A. Vaia, T.K. Teukolsky, E.P. Giannelis, Chem. Mater. 1994, Vol 6, No.7, 1017-1022. The result is a so-called interstratified clay.

30 The polymerizable monomers that are used in the process according to the invention can be polar, less polar and non-polar monomers. The monomers have at least one unsaturated C=C-bond. By preference, at least one monomer of a polar nature is used. Polar monomers
35 are monomers having a dipole moment greater than 1.0 D. Less polar monomers are monomers having a dipole moment of less than 1.0 D. Non-polar monomers do not have a

dipole moment. The polarity is measured in the gas phase (Handbook of Chemistry and Physics, 66th Edition, CRC Press, pp. E58-E60).

Polar monomers are for instance monomers
5 which contain at least one nitrogen and/or oxygen atom. Examples of such monomers are monomers containing a carboxylic acid group, an ester group, a hydroxyl group, an epoxy group, an anhydride group, a nitrile group, an amide group, an imide group or a pyridine
10 group. Examples are, for instance, acrylic acid, methacrylic acid, maleic acid, fumaric acid, itaconic acid, citric acid, maleic anhydride, itaconic anhydride, glycidyl acrylate, glycidyl methacrylate, allyl glycidyl ether, allyl amine, aminoethyl
15 methacrylate, 2-hydroxyethyl acrylate, maleimide, 2-vinyl pyridine and 1-vinyl-2-pyrrolidone. Preferably, monomers containing an epoxy group are selected from this group of monomers, with particular preference being given to glycidyl methacrylate.

20 Examples of less polar monomers and non-polar monomers are styrene-containing monomers or diene-containing monomers. Examples of these are styrene, α -methylstyrene, p-methylstyrene, 1,3-butadiene and isoprene. Preferably, a styrene-
25 containing monomer is chosen from this group of monomers. By special preference, these are styrene and α -methylstyrene.

The layered, interstratified clay is preferably impregnated with a mixture of two monomers
30 which are copolymerizable, the first monomer being a polar monomer and the second one being a monomer that is non-polar or less polar than the first one. The mixture of two monomers preferably consists of a mixture of a styrene-containing monomer and a monomer
35 containing an epoxy group.

As peroxide can be used the known and

commercially available peroxides. Examples of peroxides that can be used are: t-butyl peroxybenzoate, t-butyl peroxy-2-ethylhexanoate, bis(t-butyl peroxyisopropyl)benzene, acetyl cyclohexane sulphonyl peroxide, t-butyl hydroperoxide, di-lauroyl peroxide and di-cumyl peroxide. The peroxides are generally used in an amount of 0.01 -0.5 wt.% relative to the amount of the polyolefin in the polyolefin-based composite material, preferably in an amount of 0.05-0.3 wt.%. The peroxide can be mixed together with the monomer during the impregnation of the clay; it can also, and with preference, be added during the mixing of the impregnated clay with the polyolefin, or be present in the polyolefin. It is preferred that also the polyolefin contains at least part of the monomer(s), before the mixing of the impregnated clay with the polyolefin. As a result of the process of the present invention, the polymerizable monomer(s) is (are) polymerized to form the corresponding homo- or copolymer as well as a graft(co)polymer of the polyolefin.

Suitable polyolefines are homo- or copolymers of α -olefines, internal olefines, cyclic olefines and di-olefines. In particular, the process is suitable for enhancement of the rigidity of homo- or copolymers of α -olefines. The α -olefine is preferably chosen from the group comprising ethylene, propylene, n-butene, n-pentene, n-heptene and n-octene (substituted or non-substituted), mixtures thereof being also suitable. More preferably, a homo- or copolymer of ethylene and/or propylene is used as polyolefin. Examples of such polyolefines are homo- and copolymers of (semi-) crystalline polyethylene of both high and low density (for instance HDPE, LDPE and LLDPE) and polypropylene homo- and copolymers (PP and EMPP). It is also possible to use as polyolefin

amorphous or rubber-like copolymers on the basis of ethylene and another α -olefine; for instance EPM rubber (ethylene/propylene rubber), EADM rubber, (ethylene/ α -olefin/diene rubber), and in particular EPDM rubber
5 (ethylene /propylene/ diene rubber).

The polyolefin-based composite material may contain the usual additives for polyolefines, such as for instance UV stabilizers, flame retardants, antioxidants, nucleating agents, colorants and
10 plasticizers.

The layered swellable clay, treated with a tetraalkyl cation, can be impregnated with at least one monomer and a peroxide by for instance mixing the monomer with the peroxide and then mixing the resulting
15 mixture with the clay. Then the impregnated clay can be kneaded and mixed together with the olefinic homo- or copolymer. Another possibility is to place the interstratified clay on a powder bed of olefinic homo- or copolymer. Next, the monomer and the peroxide are
20 applied onto the clay and then the whole is mixed with the rest of the olefinic homo- or copolymer and subsequently kneaded. Kneading of the impregnated clay and the peroxide with an olefinic homo- or copolymer takes place at a temperature above the melting
25 temperature of the polyolefin, and above the decomposition temperature of the peroxide. This is normally done in a single- or twin-screw extruder, but it is also possible to make use of for instance a static mixer or a batch mixer.

30 The invention also relates to a high-rigidity polyolefin-based composite material comprising 98-50 wt.% of a polyolefin, 1-50 wt.% of another homo- or copolymer and 1-50 wt.% of a layered clay.

Such a polyolefin-based composite material
35 is also known from EP-A-807,659, which describes among other things a polyolefin composition comprising 99.9

wt.% of a polyolefin which contains a least 1 wt.% of a modified polyolefin and 0.1-40 wt.% of a layered clay.

A drawback of the polyolefin composition described in EP-A-807,659 is that it has a low rigidity at high temperatures, in particular at temperatures above 100 °C.

When a polyolefin-based composite material is prepared with application of the process according to the invention, a polyolefin-based composite material is obtained which also at elevated temperatures possesses a high rigidity.

The high-rigidity polyolefin-based composite material according to the invention is characterized by the ratio of its modulus of elasticity (M_{poc}) to the modulus (M_{po}) of the initial polyolefin, at a temperature T which is 30°C or less below the melting temperature T_m of the polyolefin, being higher than or equal to 1.

Preferably the ratio of the modulus of elasticity (M_{poc}) of the high-rigidity polyolefin-based composite material to the modulus (M_{po}) of the initial polyolefine, at a temperature T which is 15°C or less below the melting temperature T_m of the polyolefin, is higher than or equal to 1.

The above in formula-form:

$$\frac{M_{poc}}{M_{po}} \geq 1 \text{ at } T \geq T_m - 30^\circ\text{C and preferably } \frac{M_{poc}}{M_{po}} \geq 1 \text{ at } T \geq T_m - 15^\circ\text{C}$$

30

The layered clay is present in an amount of 1-50 wt.% relative to the total polyolefin-based composite material. The polyolefin is present in an amount of 98-50 wt.% relative to the total polyolefin-based composite materials. The quantity of the other homo- or copolymer originating from the polymerizable monomer or monomers is equal to 1-50 wt.% relative to

the total of monomer(s) for the polyolefin-based composite material. The weight ratio between the total of homo- or copolymer and the clay generally is 0.05 up to and including 2, preferably 0.05 up to and including 1.

Further advantages of the polyolefin-based composite materials according to the invention are that they have a lower coefficient of expansion and a better flame retardancy than the initial polyolefines.

The extruded moulded part according to the invention optionally comprises additives, for example other types of fillers and reinforcing materials, for example glass fibres and talcum, flame retardants, foaming agents, stabilizers, antiblocking agents, slipping agents, acid scavengers, antistatics, flow-promoting agents and colorants and pigments.

The high-rigidity polyolefin-based composite materials according to the invention are very suitable for the production of mouldings, for instance by injection moulding or extrusion compression. The polyolefin-based composite materials can be used as such for the manufacture of a moulding, but they can also be mixed for instance with unmodified polyolefin. Polyolefin-based composite materials which contain a high weight percentage of clay can be seen as masterbatches and can be admixed with unmodified polyolefines in order to get a lower clay content in the moulding as a whole. The polyolefin-based composite materials according to the invention are also highly suitable for the production of automobile components. Many of those components are required to have a good rigidity at elevated temperatures as well. Examples of such automobile components are dashboards, bumpers, mudguards and bonnets.

In the polyolefin based material of the invention an additional polar polymer can be present,

like a nylon, styrene/acrylonitrile copolymer (SAN), acrylonitril/butadiene/styrene terpolymer (ABS), a styrene/carboxylic acid or styrene/carboxylic acid anhydride copolymer (like styrene/maleic anhydride (SMA) copolymer). Preferably a nylon (or polyamide) is present; the resulting polymeric composition is, due to its ingredients, a well compatibilized blend of a polyolefin and a nylon. As nylons can be used polycaprolactam (nylon 6), polyhexamethylene adipamide (nylon 6,6), polytetramethylene adipamide (nylon 4,6), as well as other nylons known in the art.

The invention will be elucidated in the following by means of Examples and comparative experiments, without being restricted thereto.

15

Examples

Starting products

A) Polyolefine

20 A1) Polypropylene homopolymer, Stamydan® P 15M00, DSM; melting temperature $T_m = 165\text{ }^{\circ}\text{C}$ (determined with DSC (differential scanning calorimetry), at $10\text{ }^{\circ}\text{C}/\text{min}$).

B) Monomers

25 B1) Styrene, 99% stabilized with 10-15 ppm 4-t-butylcatechol, Aldrich

B2) Glycidyl methacrylate, 97% stabilized with 100 ppm monomethyl ether hydroquinone, Aldrich

30 C) Peroxide

C1) Trigonox C®, t-butyl-peroxi-benzoate, 98%, Aldrich

D) Layered clay

D1) Montmorillonite modified with
dimethyldi(hydrogenated long hydrocarbon chains)
ammonium chloride (125 mer), SCPX 1313, Southern Clay
5 Products Inc.

E) Miscellaneous

E1) Irganox® B225, Ciba Specialty Compounds

10 Preparation of the high-rigidity polyolefin-based
composite material

Examples I-III and comparative experiment A.

15 A solution of the monomer or the monomers, the peroxide
and optionally a UV stabilizer was prepared. This
solution was added dropwise to the layered clay. When
the clay had swollen, polymer powder was added, after
which the whole was mixed on a mini-extruder
20 (Cordewener, T=220°C, t=5 min., 200 rpm). In the
comparative experiment the UV stabilizer was added as a
solid substance. The composition of the various
polyolefin-based composite materials is shown in
Table 1.

25 The rigidity of each of the polyolefin-
based composite materials at different temperatures is
shown in Table 2 and also in Figure 1. The rigidity
(modulus of elasticity, E') was measured in accordance
with ASTM D5026 with a frequency of 1 Hz across a
30 temperature range from -130 to 160 °C.

The rigidity of the polypropylene at
Tm-30°C was 225 MPa; The rigidity of the polypropylene
at Tm-15°C was 98 MPa.

Table 1

Example/ Comparative experiment	Polyolefin, (PO) (wt.%)	Clay (wt.%)	Monomer (wt.%)	Peroxide (wt.% rel. to PO)	Miscellaneous (wt.% rel. to PO)
I	A1, 86	D1, 10.7	B1, 2.2	C1, 0.14	E1, 0.08
			B2, 1.0		
II	A1, 83	D1, 10.4	B1, 4.8	C1, 0.31	E1, 0.18
			B2, 2.2		
III	A1, 80	D1, 10.2	B1, 6.6	C1, 0.44	E1, 0.26
			B2, 3.3		
A	A1, 89	D1, 10.0	--	--	E1, 0.23

Table 2

Example	Temperature (°C)	E-modulus (MPa)
I	-100	6498
	23	2692
	100	711
II	-100	6126
	23	2367
	100	574
III	-100	6411
	23	2631
	100	561
A	-100	6060
	23	2323
	100	598

Examples IV-VII

A mixture of monomers, the peroxide and a stabilizer (B225) were sprayed over the layered clay. After the swelling of the clay had taken place, the mixture was added to the polypropylene and compounded in the mini-extruder at $T = 220^{\circ}\text{C}$, $t = 5$ min; the screw rotation speed was 250 rpm. The composition of the compounds is given in Table 3.

Table 3

Example	Polyolefin, (PO) (wt.%)	Clay (wt.%)	Monomer (wt.%)	Peroxide (wt.% rel. to PO)	Miscellaneous (wt.% rel. to PO)
IV			B1, 2.3 B2, 1.1	0.027	0.07
V	A1, 85.8	D1, 10.8	B1, 2.2 B2, 1.1	0.053	0.07
VI	A1, 85.8	D1, 10.8	B1, 2.2 B2, 1.1	0.095	0.07
VII	A1, 85.8	D1, 10.8	B1, 2.2 B2, 1.0	0.116	0.07

The rigidity of these products was measured. The results are given in Figure 2.

C L A I M S

1. Process for the production of a polyolefin-based composite material of high rigidity, said material comprising a polyolefin and a layered clay, characterized in that the polyolefin-based composite material is obtained by impregnating a layered, swellable clay which is interstratified with a tetraalkylonium cation, with at least one polymerizable monomer and then mixing this impregnated clay with a polyolefin and a peroxide, at a temperature above the melting temperature of the polyolefin.
2. Process according to claim 1, characterized in that the monomer is a polar monomer.
3. Process according to any one of claims 1-2, characterized in that the monomer contains at least one nitrogen and/or oxygen atom.
4. Process according to any one of claims 1-3, characterized in that the interstratified clay is impregnated with two monomers which are copolymerizable, the first monomer being a polar monomer and the second one being a monomer that is non-polar or less polar than the first one.
5. Process according to claim 4, characterized in that a mixture of a styrene-containing monomer and a monomer containing an epoxy group is used.
6. Process according to claim 5, characterized in that the styrene-containing monomer is styrene or α -methyl styrene.

7. Process according to claim 5 or 6, characterized in that the monomer containing an epoxy group is glycidyl methacrylate.
8. Process according to any one of claims 1-7, characterized in that the layered clay is montmorillonite.
9. Process according to anyone of claims 1-8, characterized in that the peroxide is present in, or added to the polyolefin, during the mixing of the impregnated clay with the polyolefin.
10. Process according to anyone of claims 1-9, characterized in that the polyolefin also contains at least part of the polymerizable monomer(s), before the mixing of the impregnated clay with the polyolefin.
11. High-rigidity polyolefin-based composite material comprising 98-50 wt.% of a polyolefin, 1-50 wt.% of another homo- or copolymer and 1-50 wt.% of a layered, interstratified clay, characterized in that the ratio between the modulus of elasticity of the high-rigidity polyolefin-based composite material and the modulus of the initial polyolefin, at a temperature T which is 30°C or less below the melting temperature T_m of the polyolefin, is higher than or equal to 1.
12. Composite material according to claim 11, characterized in that the ratio between its modulus of elasticity and the modulus of the initial polyolefine, at a temperature T which is 15°C or less below the melting temperature T_m of the polyolefin, is higher than or equal to 1.

13. Moulding containing a high-rigidity polyolefin-based composite material obtained by a process according to any one of claims 1-10 or according to any one of claims 11-12.
14. Automobile component containing a high-rigidity polyolefin-based composite material obtained by a process according to any one of claims 1-10 or according to any one of claims 11-12.
15. Layered clay, characterized in that the layered clay is interstratified with a tetraalkylonium cation and impregnated with at least one polymerizable monomer.
16. Layered clay according to claim 15, characterized in that the layered clay is also impregnated with a peroxide.
17. Composite material according to claim 11, characterized in that it also comprises a nylon.

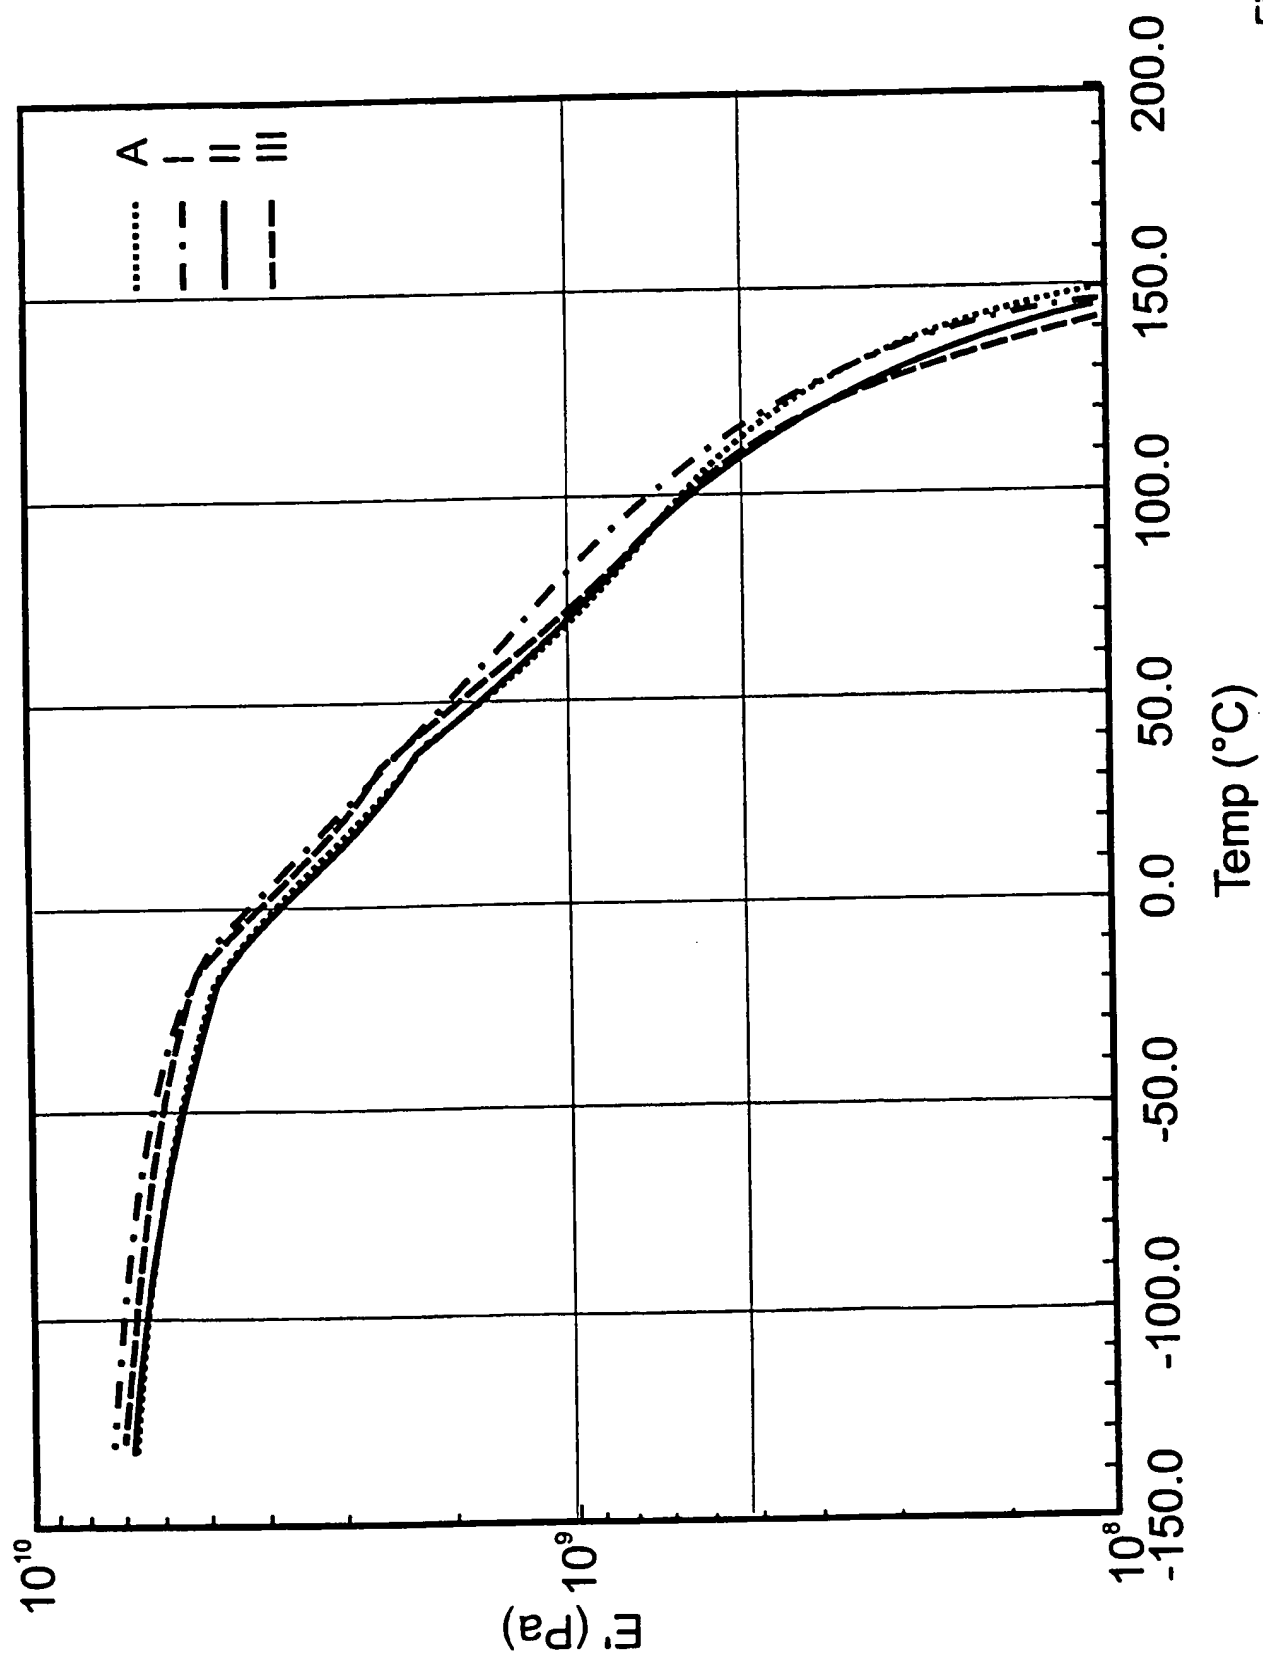


Figure 1

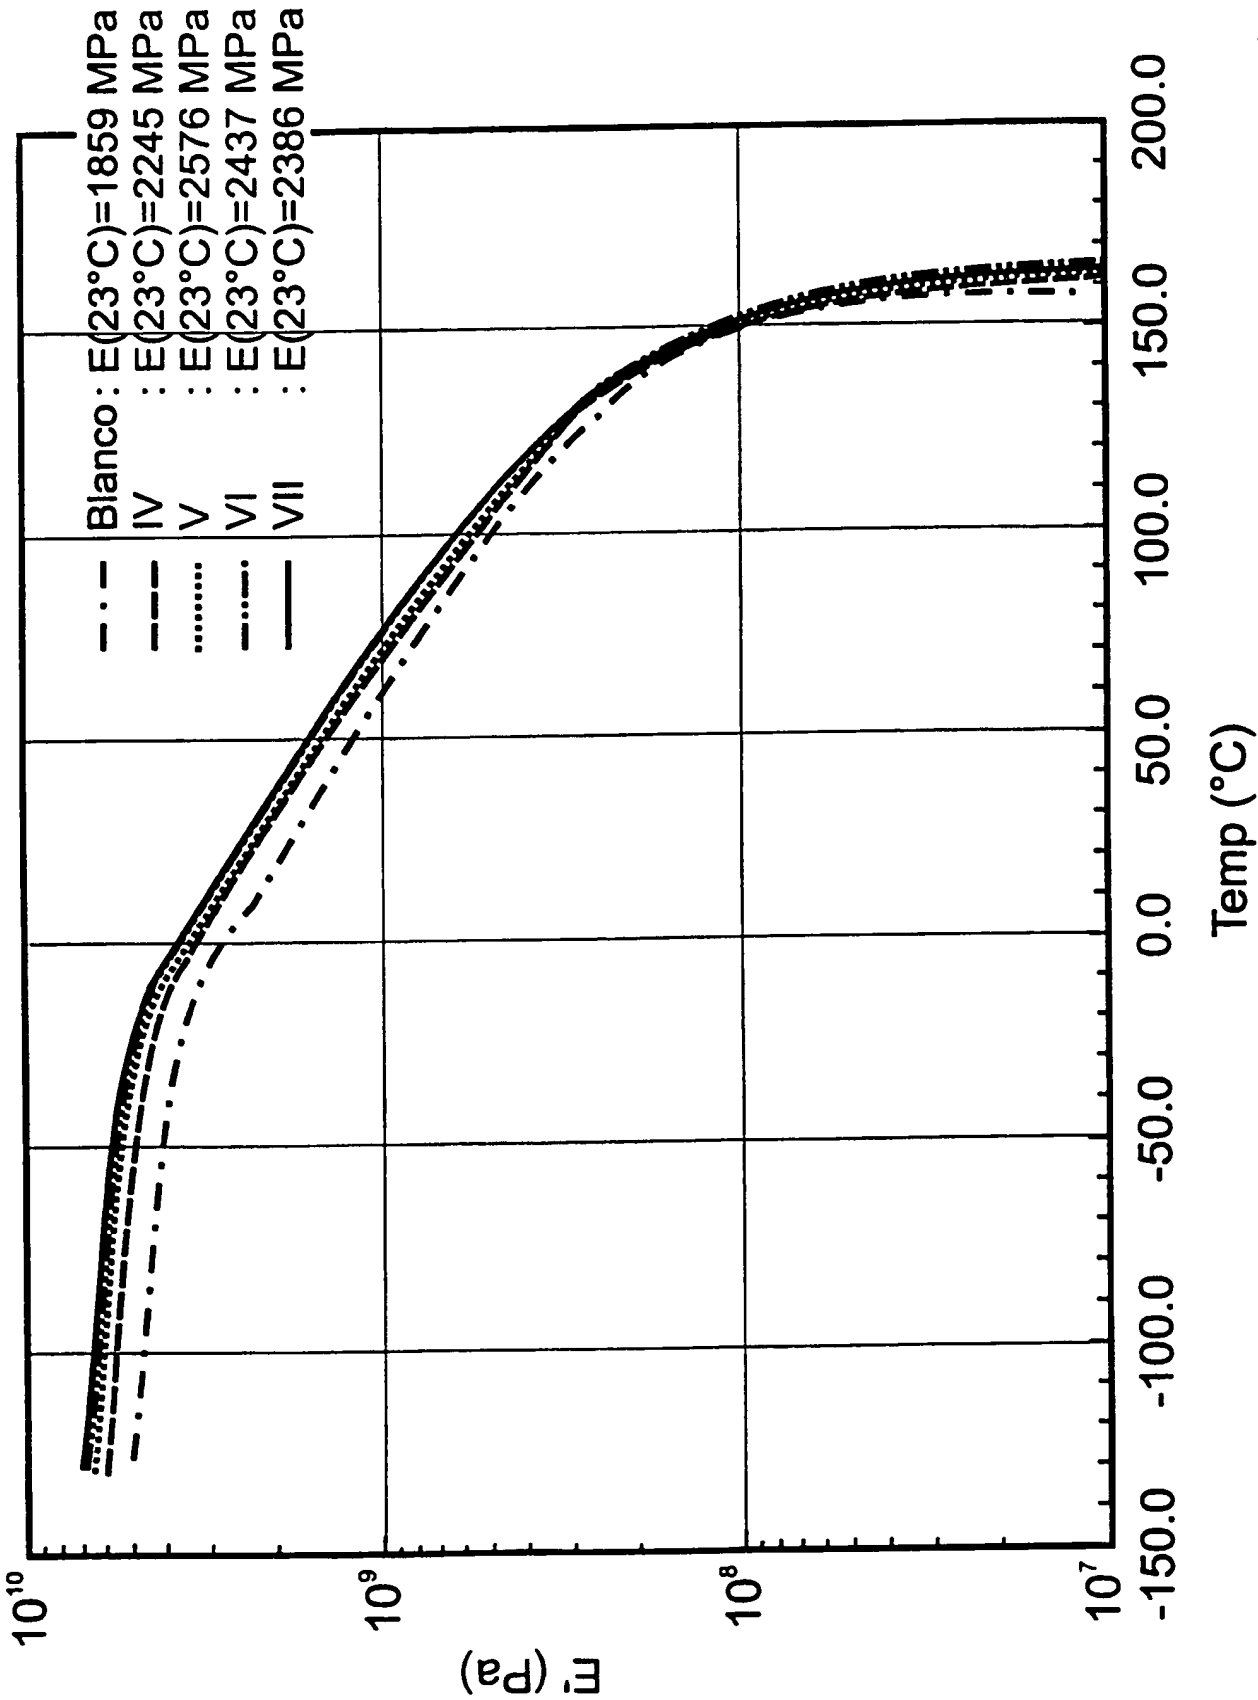


Figure 2

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/NL 00/00467

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08J3/20 C08K9/04 C08L23/02 C08F2/44 C01B33/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08K C08J C08F C01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 807 659 A (SHOWA DENKO KK) 19 November 1997 (1997-11-19) cited in the application page 13; examples 1-18 claims 1-10 -----	1-17

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

1 November 2000

Date of mailing of the international search report

09/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Siemens, T

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat/ Application No

PCT/NL 00/00467

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0807659 A	19-11-1997	AT 186315 T	15-11-1999
		DE 69700720 D	09-12-1999
		DE 69700720 T	06-04-2000
		JP 10030039 A	03-02-1998
		US 5939184 A	17-08-1999
